

BREMICK®

XTP™

EXTREME TRADE PERFORMANCE

BUGLE BATTEN

Bremick® XTP™ Bugle Battens deliver Xtreme Trade Performance when fixing timber to timber.

Bremick® XTP™ Bugle Battens bite and drive instantly to install 2x faster than a standard Bugle Batten due to their unique Pyramid Point® design and serrated sharp threads which cut timber fibres and provide a strong hold while reducing installation torque.

The self-embedding bugle head pulls the timber materials together tightly and enables a clean finish while the precision T40 drive recess offers one handed operation and maximum torque application.



T40
DRIVE
FREE BIT INCLUDED

SERRATED
SHARP
THREAD

PYRAMID
POINT®

OVER **2X** FASTER*

• PRECISION TORX DRIVE+
Resists Cam Out

• SERRATED SHARP THREAD
Cuts Timber Fibres

• PYRAMID POINT®
Instant Drive

Ideal for Timber to Timber Construction

- Framing
- Decking
- Pergolas
- Landscaping
- Retaining Walls
- Fencing & Gates
- Furniture Construction

ENHANCED APPEARANCE

Treated pine timber approved
Moderate Corrosion Protection

TECHNO GUARD™

ZINC

GALV

Moderate

TECHNO GUARD™

B8®

SS 316

CORROSION RESISTANCE


SUITABLE FOR TREATED PINE

BREMICK®

XTP™

EXTREME TRADE PERFORMANCE

BUGLE BATTEN

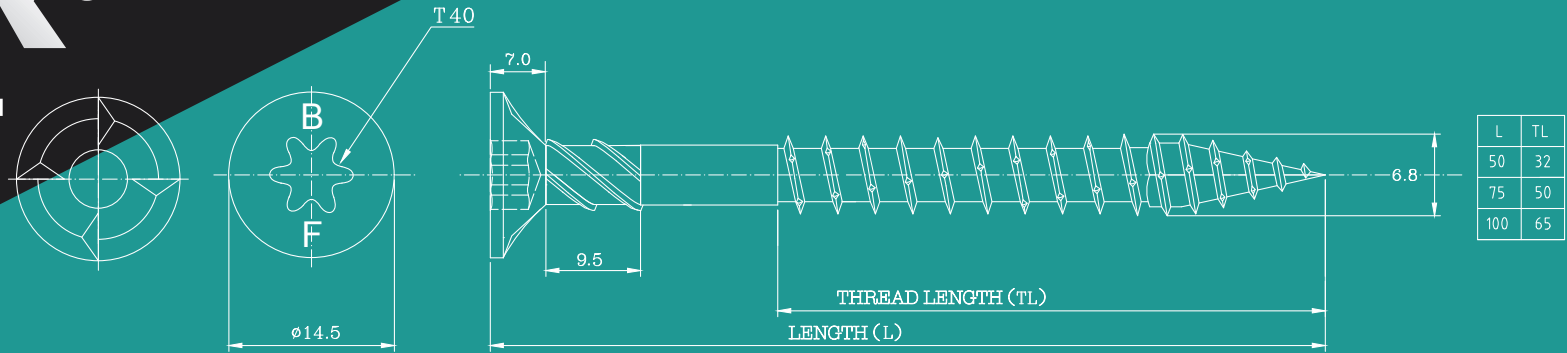

Material	Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Embedment Depth (mm)	Mean Ultimate Pull Out in F5/JD4 (kN)	Mean Ultimate Pull Out in F17/JD3 Hardwood Timber (kN)
Carbon Steel -14g	13.4	20.3	20.3	35	7.5	8.8

The Axial withdrawal force required in AS3566.1 at 35mm embedment in F5 Radiata Pine is 3.1 kN
 The above results have been conducted under laboratory conditions. Appropriate safety factors must be applied

Bunnings Fineline	Bremick Short Code	Bremick Long Code	Description	Size	Coating	Qty	Barcode
575873	621093	SQBBTCB140502M	XTP Bugle Batten	14g x 50mm	Technoguard Black	25	9337357621093
575891	621154	SQBBTCB140752M	XTP Bugle Batten	14g x 75mm	Technoguard Black	25	9337357621154
575874	621185	SQBBTCB140752T	XTP Bugle Batten	14g x 75mm	Technoguard Black	100	9337357621185
575897	621208	SQBBTCB140752I	XTP Bugle Batten	14g x 75mm	Technoguard Black	500	9337357621208
575881	621215	SQBBTCB141002M	XTP Bugle Batten	14g x 100mm	Technoguard Black	25	9337357621215
575876	621246	SQBBTCB141002T	XTP Bugle Batten	14g x 100mm	Technoguard Black	100	9337357621246
575880	621260	SQBBTCB141002I	XTP Bugle Batten	14g x 100mm	Technoguard Black	500	9337357621260

Installation


1. Select a screw length that allows for approximately 50% of the screw to embed into the base material.
2. Insert driver bit into power tool and select speed setting.
3. Place tip of screw at fastening point and apply firm pressure.
4. Drive until head is flush. Do NOT overdrive

Installation Tips

When fastening to hardwood for best results pre-drilling and countersinking is recommended.

DRIVER SPEED:
 Softwood: 2,000 - 3,000 RPM
 Hardwood: 500 - 1,000 RPM

DRIVER BIT:
 T40

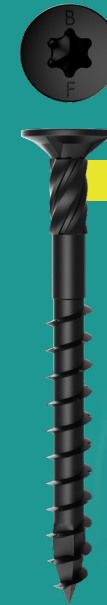

Complies with AS3566

OVER 2X* FASTER

*Between 2x to 3x faster than the traditional Bugle Batten depending on length, coating, timber and driving tool.
 +Torx is a registered trademark owned by Acument Intellectual Properties, LLC.

