




MODEL NO.: 280497

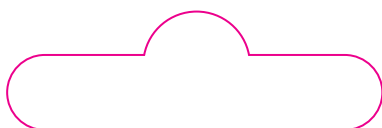

- ✓ **EASILY REPLACE YOUR 2M FLEXIBLE HOSE**
- ✓ **LONG LASTING, DOUBLE LOCK STAINLESS STEEL**
- ✓ **FEMALE G1/2" CONNECTION TO SUIT ALL HAND SHOWERS**

INSTALLATION INSTRUCTIONS

1. Ensure shower taps are turned off.
2. Unscrew & discard old shower hose.
3. Hand tighten new shower hose to the shower hand piece, ensuring that the washer remains inside the shower hose nut & the male connecting threads do not damage the flow controller.
4. Screw the shower hose onto the shower holder hose connection.
5. Insert hand piece into the holder to check positioning.
6. Turn on shower & inspect for leaks.

HANDY HINT: If there is a slight leak at the wall outlet or the shower holder hose connection, turn off taps, loosen & remove the shower holder. Apply thread seal tape (not included) to the wall outlet thread & the shower hose connection thread. Wrap in a clockwise direction, overlap several turns, pulling the tape into the thread, then break tape to seal. Reconnect hose to wall & shower hand piece.

PRODUCT SPECIFICATIONS

- Operating Temperature: 10-50°C
- Working pressure: 100-500 kPa (14.5 to 72.5psi)

PRODUCT REQUIREMENTS

Do not overtighten nuts as damage may occur. Shower head must be installed with a maximum flow rate of 9L/min so that the product complies with requirements under AS/NZS 3500.1, clause 3.2.1.

Some showers may not be suitable when used with gravity fed heated water systems or where pressures are less than 150kPa at the outlet.

Showers with flow rates of less than 9LPM may not allow the following to function correctly:

- Low & unequal pressure supplies.
- Gravity-fed water heaters.
- Some tempering valves.
- Some instantaneous water heaters.
- Some thermostatic mixing valves.

This product has been granted WaterMark Certification in accordance with AS/NZS 3662. Please ensure the product is installed in compliance with Section 4 of AS/NZS 3500.1 if a dual check valve is required to prevent backflow.

NOT TO BE USED AS A WATER LINE UNDER CONSTANT PRESSURE.

PlumbConnect® Plumbers Registry
To find a plumber in your area, consult our Plumbers Registry with this QR code.



FIX-A-TAP®
AUSTRALIA PTY LTD
The Ultimate Plumbing Solution
PO Box 200 Wahroonga
NSW 2076 Australia
Made in China ©2025
www.fixatap.com.au

Visit our website for socials,
plumbers, product info & more



A family owned Australian business

Quality Assured Products
FIX-A-TAP® has been providing Australians with quality plumbing products since 1972.

