

BREMICK®

XTP™


EXTREME TRADE PERFORMANCE

BUGLE BATTEN

Bremick® XTP™ Bugle Battens deliver Xtreme Trade Performance when fixing timber to timber.

Bremick® XTP™ Bugle Battens bite and drive instantly to install 2x faster than a standard Bugle Batten due to their unique Pyramid Point® design and serrated sharp threads which cut timber fibres and provide a strong hold while reducing installation torque.

The self-embedding bugle head pulls the timber materials together tightly and enables a clean finish while the precision T40 drive recess offers one handed operation and maximum torque application.

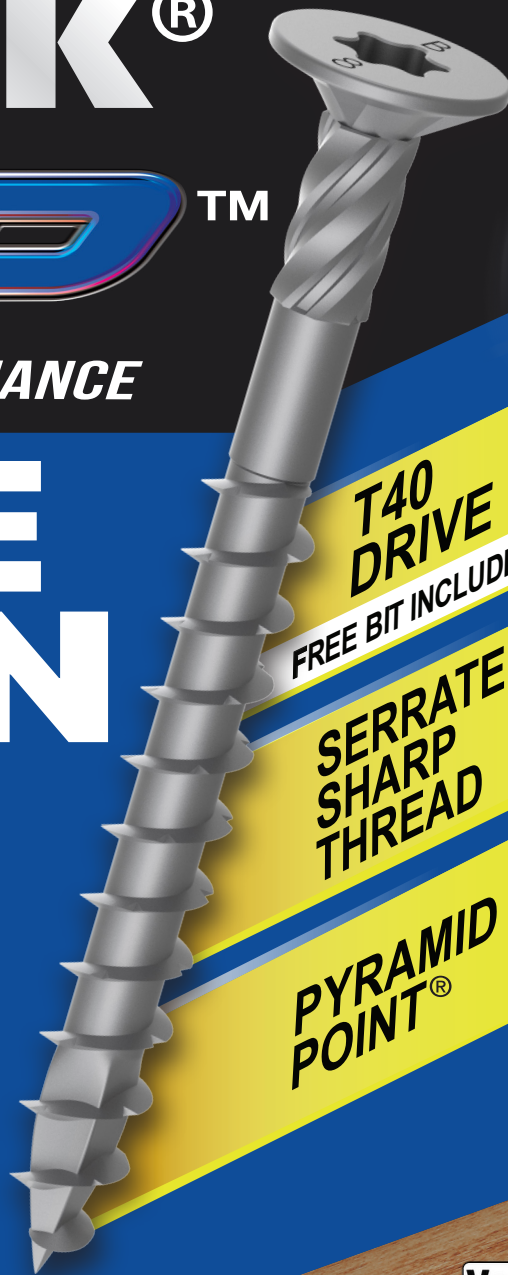

T40
DRIVE

FREE BIT INCLUDED


SERRATED
SHARP
THREAD

PYRAMID
POINT®


OVER **2X** *
FASTER



• **PRECISION TORX DRIVE+**
Resists Cam Out



• **SERRATED SHARP THREAD**
Cuts Timber Fibres



• **PYRAMID POINT®**
Instant Drive

Ideal for Timber to
Timber Construction

- Framing
- Decking
- Pergolas
- Landscaping
- Retaining Walls
- Fencing & Gates
- Furniture Construction

**DRILLS FASTER,
LASTS LONGER**

Suitable for severe
external environments
Ultra Outdoor Protection

B8®
COATING

ZINC

GALV

TECHNO
GUARD™

Very High
B8®

SS 316

CORROSION RESISTANCE


**ULTRA OUTDOOR
PROTECTION**

BREMICK®

XTP™

EXTREME TRADE PERFORMANCE

BUGLE BATTEN

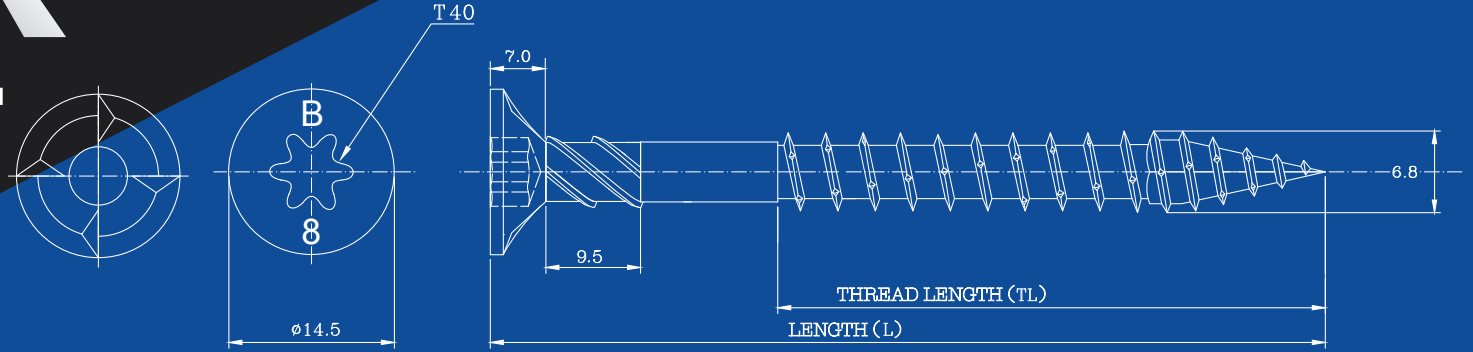

L	TL
50	32
75	50
100	65
125	75
150	100

Material	Single Shear (kN)	Axial Tensile (kN)	Torsional (Nm)	Embedment Depth (mm)	Mean Ultimate Pull Out in F5/JD4 (kN)	Mean Ultimate Pull Out in F17/JD3 Hardwood Timber (kN)
Carbon Steel -14g	13.4	20.3	20.3	35	7.5	8.8

The Axial withdrawal force required in AS3566.1 at 35mm embedment in F5 Radiata Pine is 3.1 kN
 The above results have been conducted under laboratory conditions. Appropriate safety factors must be applied

Bunnings Finline	Bremick Short Code	Bremick Long Code	Description	Size	Coating	Qty	Barcode
575888	621680	SQB BTC8140502M	XTP Bugle Batten	14g x 50mm	B8 Coating	25	9337357621680
575877	621710	SQB BTC8140502T	XTP Bugle Batten	14g x 50mm	B8 Coating	100	9337357621710
575885	621802	SQB BTC8140752M	XTP Bugle Batten	14g x 75mm	B8 Coating	25	9337357621802
575883	621833	SQB BTC8140752T	XTP Bugle Batten	14g x 75mm	B8 Coating	100	9337357621833
575894	621857	SQB BTC8140752I	XTP Bugle Batten	14g x 75mm	B8 Coating	500	9337357621857
575889	621864	SQB BTC8141002M	XTP Bugle Batten	14g x 100mm	B8 Coating	25	9337357621864
575878	621895	SQB BTC8141002T	XTP Bugle Batten	14g x 100mm	B8 Coating	100	9337357621895
575882	621918	SQB BTC8141002I	XTP Bugle Batten	14g x 100mm	B8 Coating	500	9337357621918
575906	621925	SQB BTC8141252M	XTP Bugle Batten	14g x 125mm	B8 Coating	25	9337357621925
575875	621956	SQB BTC8141252T	XTP Bugle Batten	14g x 125mm	B8 Coating	100	9337357621956
575886	621987	SQB BTC8141502M	XTP Bugle Batten	14g x 150mm	B8 Coating	25	9337357621987
575887	622014	SQB BTC8141502T	XTP Bugle Batten	14g x 150mm	B8 Coating	100	9337357622014

Installation


1. Select a screw length that allows for approximately 50% of the screw to embed into the base material.
2. Insert driver bit into power tool and select speed setting.
3. Place tip of screw at fastening point and apply firm pressure.
4. Drive until head is flush. Do NOT overdrive

Installation Tips

When fastening to hardwood for best results pre-drilling and countersinking is recommended.

DRIVER SPEED:
 Softwood: 2,000 - 3,000 RPM
 Hardwood: 500 - 1,000 RPM

DRIVER BIT:
 T40

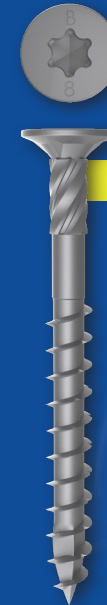

Complies with AS3566

OVER 2X* FASTER

*Between 2x to 3x faster than the traditional Bugle Batten depending on length, coating, timber and driving tool.
 +Torx is a registered trademark owned by Acument Intellectual Properties, LLC.

