



Technical Documents

1: Drawings RFRBL140

2: Flashing Technical Specifications

*Follow
Us On*



DEKS



DEKS

DEKS

DEKS

DEKS

DEKS

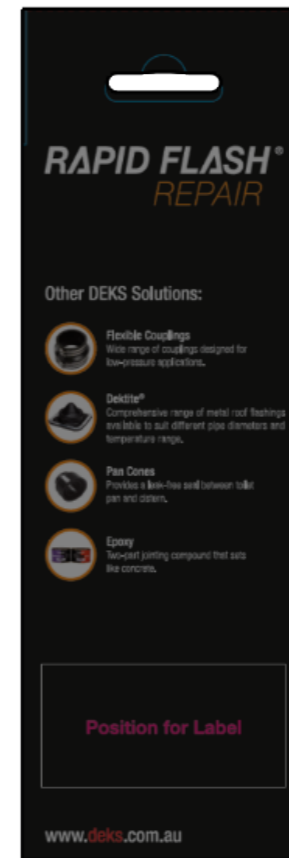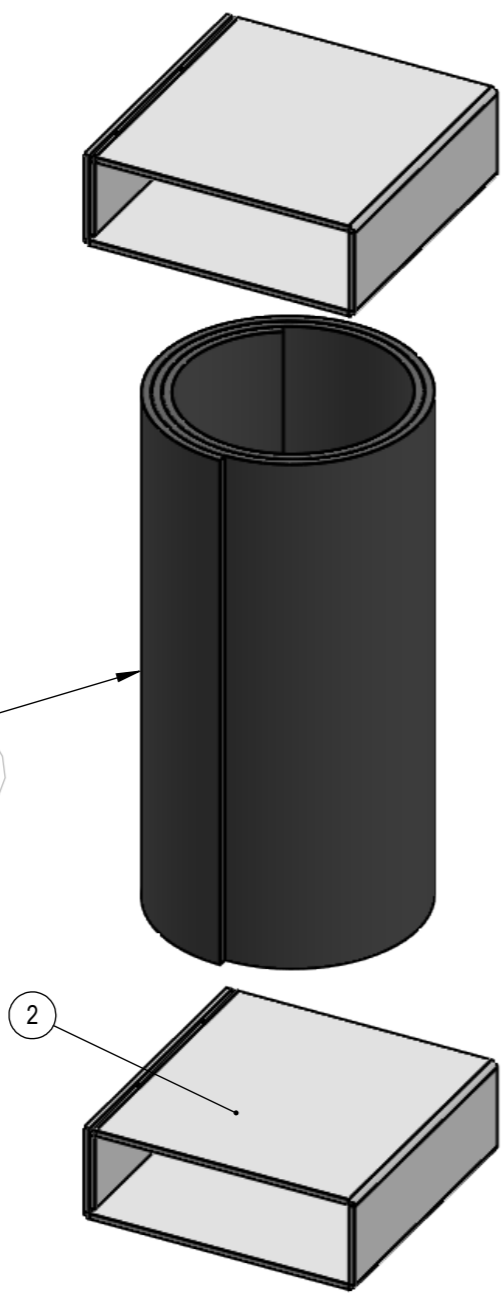

DEKS

DEKS

DEKS

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
1	RFS-140500-X	RAPID FLASH STRIP (140 x 500mm)	REFER PART NUMBER TABLE	1
2	RFSTRIP-SPACER	RFSTRIP-SPACER	E FLUTE- CARDBOARD SHEET	2
3	RFSTRIPBOX	RFSTRIP-BOX	E FLUTE- CARDBOARD BOX	1
PART NUMBER		STRIP PART NUMBER		
RFRBL140		RFS-140500-B		

DEKS Industries Pty. Ltd.
ABN 77 107 135 544

5/841 Mountain Highway
PO Box 569
Bayswater Victoria
3153 Australia
P: 03 8727 8800
F: 03 8727 8899

BAL Assessments Roof Flashings

Deks Industries Pty. Ltd. has tested its roof flashing for BAL (Bushfire Attack Level) to clause 20 of AS 1530.8.1 – 2007: “Methods for fire test on building materials, components and structures, Part 8.1 tests on elements of construction for buildings exposed to simulated bushfire attack – radiant heat and small flaming sources” and complies with it as per the table below.

All testing was completed by CSIRO Infrastructure Technologies.

BAL Rating	Models	Polymer	Use on min. 18° Roof Pitch for	CSIRO Report No.	Date of Issue
12.5	DC - Dektite Combo (no split)	EPDM	Metal Roofs	EP1312912	Dec 2013
	DFE – Dektite Premium	EPDM	Metal Roofs	EP1312912	Dec 2013
	DNL – Dektite Nu-Lead	EPDM	Tiled Roofs	EP1312992	Dec 2013
19	FFR – Fast Flash	MS Polymer	Tiled Roofs	EP159257	Dec 2015
29	DC - Dektite Combo (no split)	Silicone	Metal Roofs	EP1312939	Dec 2013
	DFE – Dektite Premium	Silicone	Metal Roofs	EP1312939	Dec 2013
	PFR - Perform	MS Polymer	Tiled Roofs	EP148152	Oct 2014