

REPAIR



BOSTON®

GREAT VALUE SOLUTIONS



WASHING MACHINE & DISHWASHER DRAIN HOSE

EXPANDS FROM 1.2 TO 4 METRES

INSTALLATION INSTRUCTIONS

- ✓ Remove old drain hose.
- ✓ Select the desired hose end alternative. The enclosed hose is Alternative 1. It can be cut to Alternative 2 (featuring 21.5mm I.D. at both ends).

FOR WASHING MACHINES

- ✓ Fasten BOSTON® drain hose to the washing machine & tub overflow.

FOR DISHWASHERS

- ✓ Fasten BOSTON® drain hose to the dishwasher & the trap spigot.
- ✓ Check for leaks during the first test cycle of the appliance.


HANDY HINTS

- ✓ To protect your hose, avoid pulling over rough surfaces during installation.
- ✓ Do not stretch, twist or kink the hose.
- ✓ To ensure a waterproof seal, fasten hose with size 0 (#209535) hose clamps for 21.5mm, size OX (#209597) hose clamps for 29mm.
- ✓ To access the 21.5mm I.D. hose end connection, cut the hose using a sharp trimming knife or hacksaw.
- ✓ It is recommended that all appliance hoses be replaced every five years.
- ✓ It is recommended that this product be installed by a licensed plumber.
- ✓ This BOSTON® drain hose features a five (5) year warranty from the date of purchase, providing the hose has been correctly installed. The BOSTON® product warranty covers defective materials & faulty workmanship. Incorrect installation may void the product warranty.

TECHNICAL SPECIFICATIONS

- ✓ Operating temperature – up to 90°C.
- ✓ Flow rate up to 22 litres/min.

HOSE END ALTERNATIVES

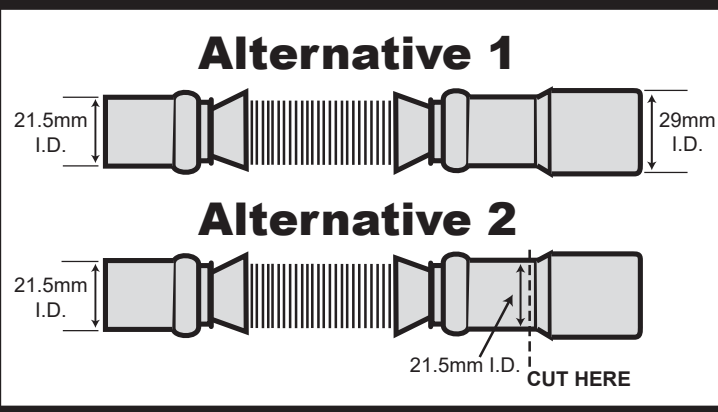

FIX-A-TAP®
AUSTRALIA PTY LTD
The Ultimate Plumbing Solution
PO Box 200 Wahroonga
NSW Australia 2076
Made in Italy ©2025
www.fixatap.com.au

Visit our website for
socials, plumbers,
product info & more



PlumbConnect®
Plumbers Register
Find a plumber on our plumbers
registry via the QR Code

