

EASY INSTALLATION

1. Turn off water at mains.
2. Remove old tap, clean threads & apply new thread seal tape.
3. Secure new tap to desired location with fasteners (fasteners not included).
4. Connect water supply line to threaded section on the underside of the tap.
5. Turn on water & check for leaks.

FIX-A-TAP®

AUSTRALIA PTY LTD

The Ultimate Plumbing Solution

PO Box 200 Wahroonga

NSW Australia 2076

Made in China ©2025

www.fixatap.com.au




We recommend using a licensed plumber.
Scan the code to find a plumber in your area.

This product meets the lead-free requirements of NCC vol 3.

Working pressure: 50kPa min - 500kPa max (7.25 min - 72.5 psi max).

If used for potable water, ensure tap is installed with a backflow prevention device.

5 year warranty. Retain proof of purchase.

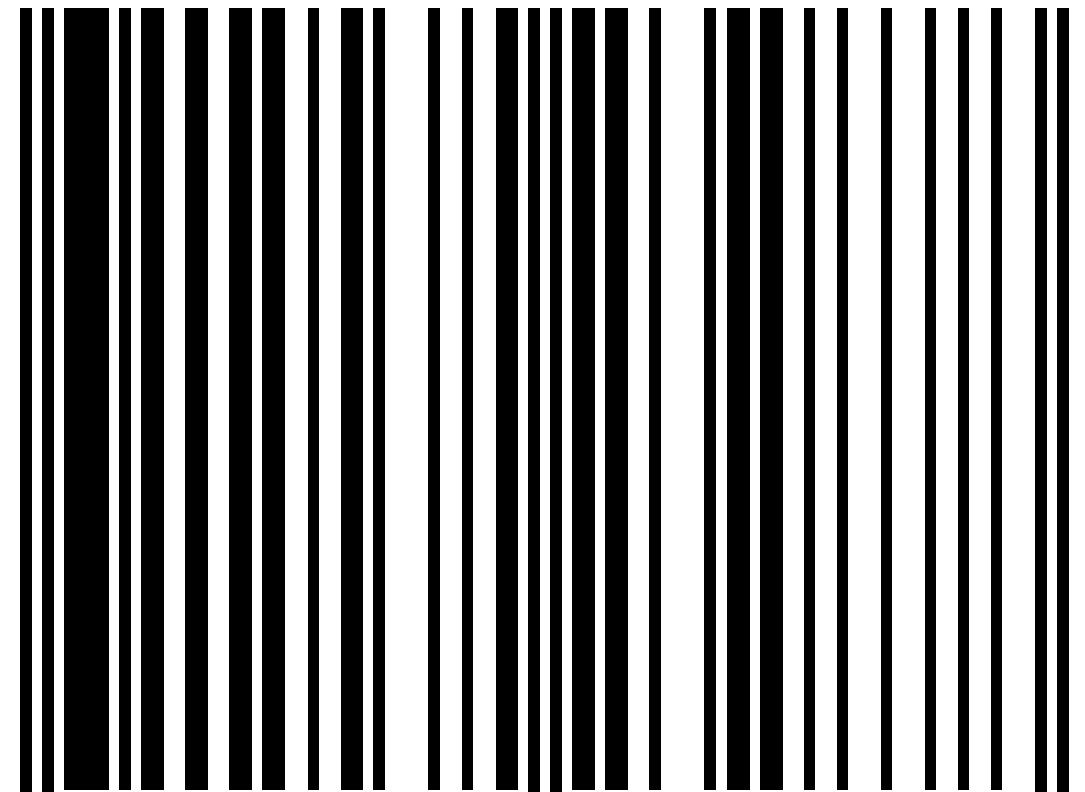

9 312232 232878 >