

HORIZONTAL POWER POINTS

6252B

10A Double Power Point

6252BK

10A Double Black Power Point

6254B

10A Double Power Point
with Extra Switch

6258B

15A Double Power Point

VERTICAL POWER POINTS


6256B

10A Vertical Double Power Point

6286B

10A Vertical Double Power Point
with Extra Switch

- ▶ Power point brass-tunnel terminals suit 4 x 2.5mm² cables.
- ▶ Fit standard Australian and New Zealand mounting accessories with 84mm mounting centres.
- ▶ Made from UV-resistant polycarbonate which will not turn yellow over time.
- ▶ Interchangeable clip-on cover with market leading brands.
- ▶ Switches comply to AS/NZS 3133.
- ▶ Socket outlets comply to AS/NZS 3112.

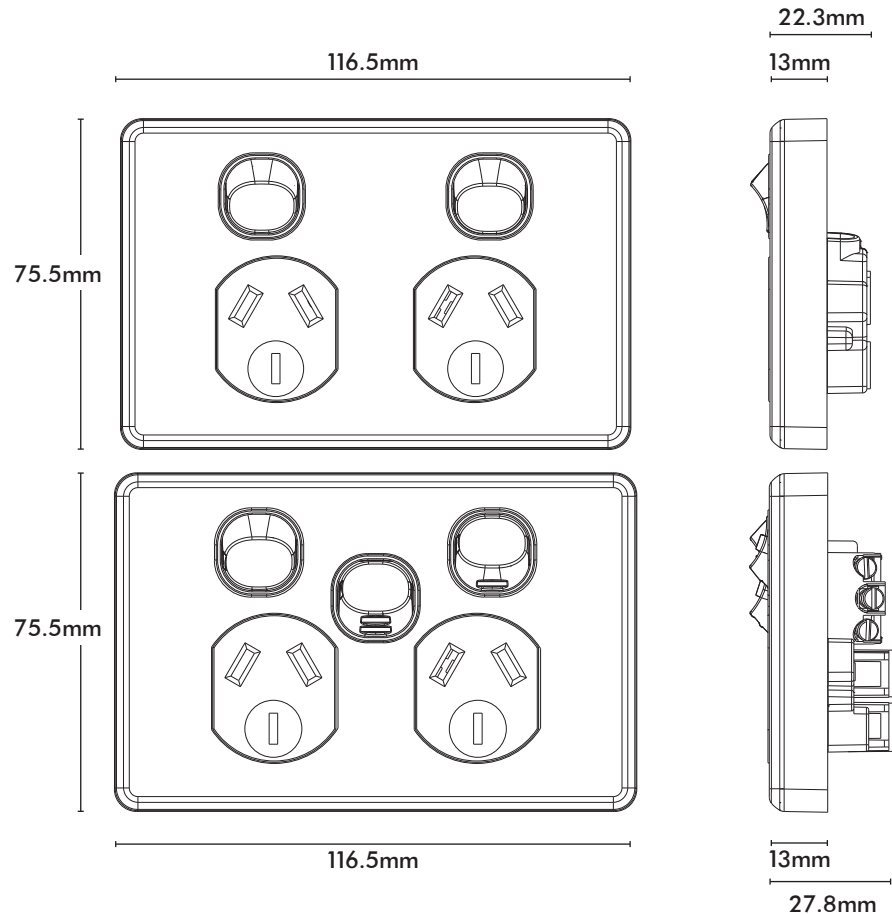

Technical Specifications

Outlets	2
Supply Voltage	250V a.c. 50Hz
Switching Poles	Active
IP Rating	IP20 (indoor use only)
Terminal Diameter	6mm
Colour	White
Rear Colour	Black
Housing Material	Polycarbonate
Contact Material	Silver
Weight	98g (without extra switch) 112g (with extra switch)
Cut-out Dimensions	80mm x 50mm
Mounting Centres	84mm
Compliance/ Standards	AS/NZS 3100, AS/NZS 3112, AS/NZS 3133



SCAN
to download
catalogue for
further detail

Phone: 1800 826 859

NZ Toll Free: 0800 003 329

Email:
custservice@detaelectrical.com.au